


Coiling Procedure

Minimum 2 people required


The most effective way to package, store, and ship handrails is to coil them. A properly coiled handrail can be packaged and stored for extended periods of time with minimal handrail distortion. When coiled improperly, handrails can become permanently distorted.

Instructions:


1. Place handrail flat on floor with sides parallel approximately one meter apart.

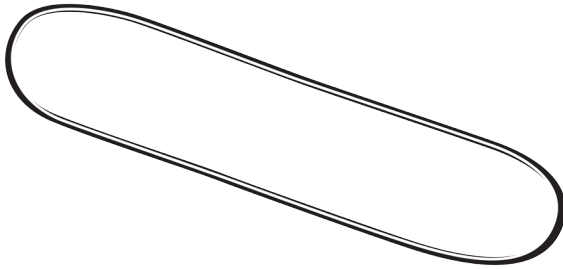

2. Begin at one end by lifting the handrail and turning it over, towards the floor.

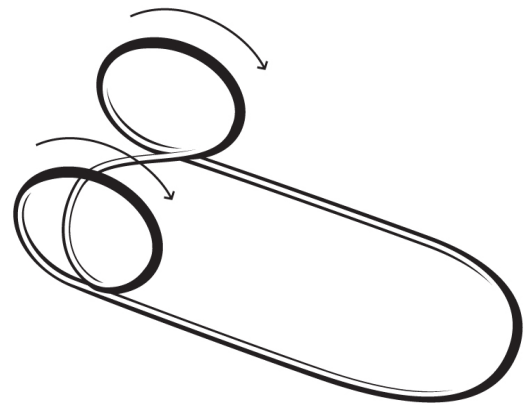

3. Roll handrail creating two separate coils. Be sure handrail is wound neatly on top of itself.

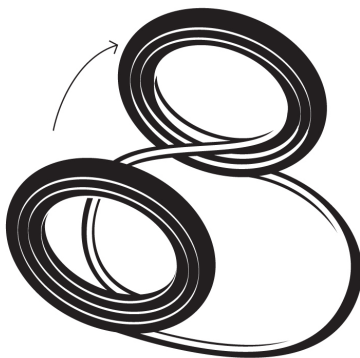


Minimum coil diameter (mm)
NT Min d \geq 700
TF Min d \geq 460

4. Place first coil flat, align inner handrail section and set second coil on top.



Adjust coil diameter as required.

Do not bend the handrail tightly or twist, as it may deform.

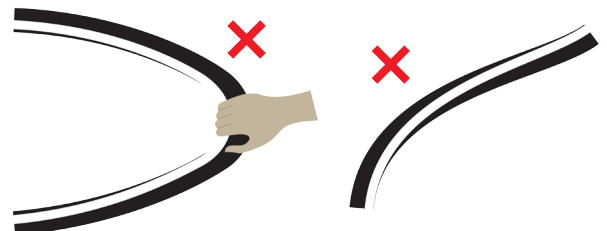

All of our handrails are backed by an industry leading warranty. For more warranty information, scan the QR code on the left or visit: <http://www.ehc-global.com/warranty>